

# CONOFLAT


- straightlined, purist design
- high level of comfort thanks to the flat enamelled waste cover that is flush with the shower area
- can be installed to be absolutely flush with the floor
- Total height (g) with horizontal waste fitting: 107 mm; fitting height incl. cover 83 mm (compared to tiled shower areas)
- made of KALDEWEI steel enamel
- ideally complements the CONODUO bath
- designed by Sottsass Associati
- drainage capacity KA 120: 0,85 l/s
- drainage capacity KA 120 vertical: 1,4 l/s



Similar illustration

	Combined Tray & Waste depth	Waste fitting depth
KA 120	107	83
KA 120 vertical	49	83

See page 291.

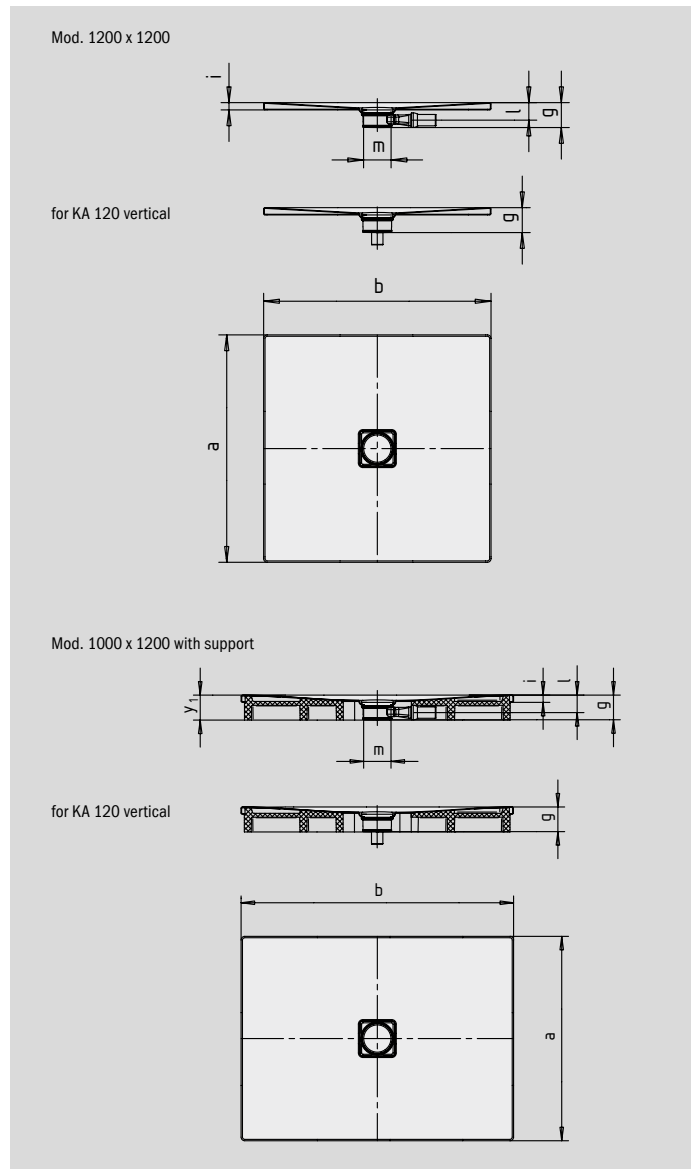

SECURE<sup>+</sup>

Model No.	792	793	794	795	796	855	
External length	a	900	1000	800	900	1000	800 mm
External width	b	1300	1300	1400	1400	1400	1500 mm
Height with siphon	g	107	107	107	107	107	107 mm
Height of rim	i	32	32	32	32	32	32 mm
Diameter of drain hole	m	120	120	120	120	120	120 mm
Siphon connection height	l	76	76	76	76	76	76 mm
Height with support	y <sub>1</sub>	110	110	110	110	110	110 mm
Weight of the enamelled shower tray in kg		30	34	29	32	36	33
Anti-slip		492 x 492	588 x 588	492 x 492	492 x 492	588 x 588	492 x 492 mm
Full anti-slip		836 x 1220	932 x 1220	740 x 1316	836 x 1316	932 x 1316	740 x 1412 mm
SECURE PLUS		all-over	all-over	all-over	all-over	all-over	all-over



The TÜV Rheinland confirms the following properties of KALDEWEI's anti-slip, full anti-slip and SECURE PLUS finish:

- Assessment group **B** for wet barefoot areas (**DIN 51097**)
- Assessment group **R 10** for slip-resistant properties in work rooms and areas with an increased risk of slipping (**DIN 51130**)

All CONOFLAT models are available either with anti-slip, full anti-slip or SECURE PLUS.

Model 790 with Full anti-slip or SECURE PLUS fits DIN barrier-free 18040-2.