


# CONOFLAT


- straightlined, purist design
- high level of comfort thanks to the flat enamelled waste cover that is flush with the shower area
- can be installed to be absolutely flush with the floor
- Total height (g) with horizontal waste fitting: 107 mm; fitting height incl. cover 83 mm (compared to tiled shower areas)
- made of KALDEWEI steel enamel
- ideally complements the CONODUO bath
- designed by Sottsass Associati
- drainage capacity KA 120: 0,85 l/s
- drainage capacity KA 120 vertical: 1,4 l/s
- model 790 with full anti-slip conforms to DIN-barrier-free 18025-2 and 18040-2

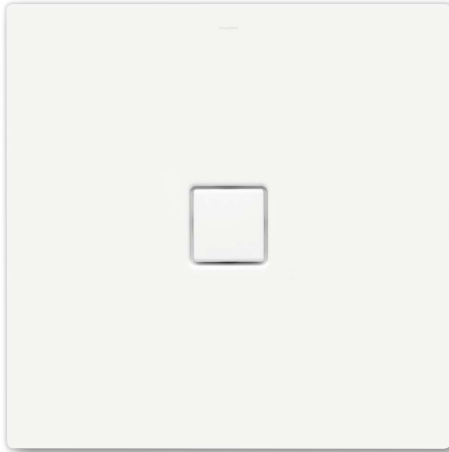

Similar illustration


	Combined Tray & Waste depth	Waste fitting depth
KA 120	107	83
KA 120 vertical	49	83

See page 291.

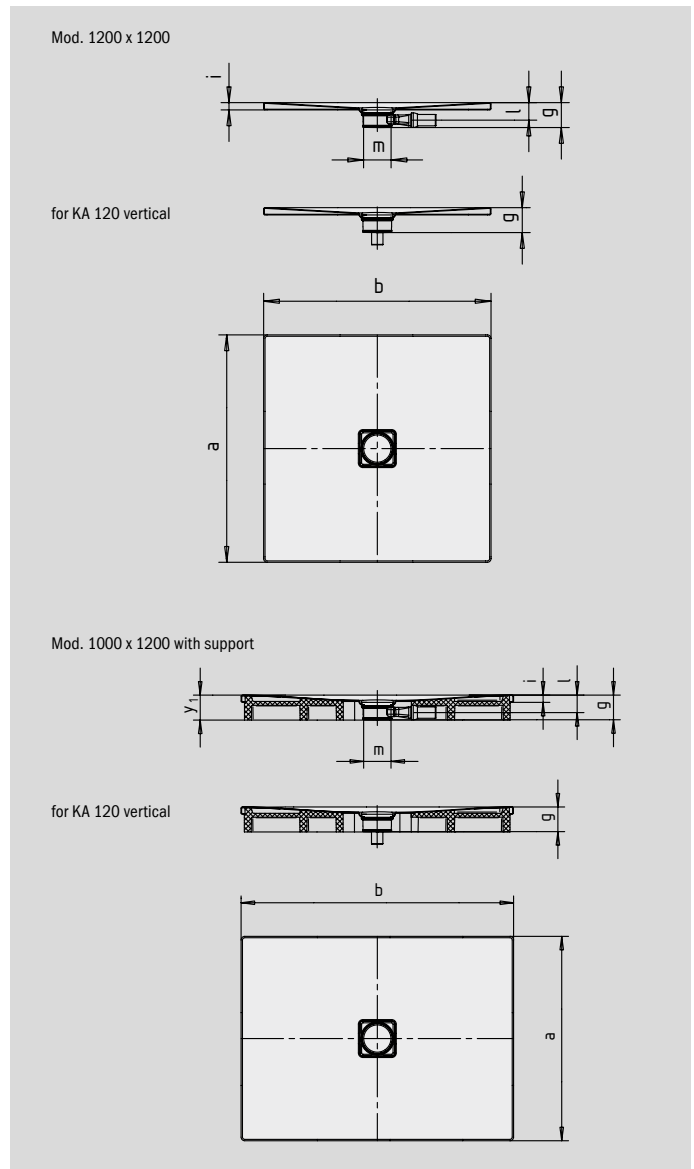

SECURE<sup>+</sup>

Model No.	782	785	789	790	791	
External length	a	800	900	1000	1200	800 mm
External width	b	1200	1200	1200	1200	1300 mm
Height with siphon	g	107	107	107	107	107 mm
Height of rim	i	32	32	32	32	32 mm
Diameter of drain hole	m	120	120	120	120	120 mm
Siphon connection height	l	76	76	76	76	76 mm
Height with support	y <sub>1</sub>	110	110	110	110	110 mm
Weight of the enamelled shower tray in kg		25	28	30	36	27
Anti-slip		492 x 492	492 x 492	492 x 492	588 x 588	492 x 492 mm
Full anti-slip		740 x 1124	836 x 1124	932 x 1124	1172 x 1172	740 x 1220 mm
SECURE PLUS		all-over	all-over	all-over	all-over	all-over



The TÜV Rheinland confirms the following properties of KALDEWEI's anti-slip, full anti-slip and SECURE PLUS finish:

- Assessment group **B** for wet barefoot areas (**DIN 51097**)
- Assessment group **R 10** for slip-resistant properties in work rooms and areas with an increased risk of slipping (**DIN 51130**)

All CONOFLAT models are available either with anti-slip, full anti-slip or SECURE PLUS.

Model 790 with Full anti-slip or SECURE PLUS fits DIN barrier-free 18040-2.