


CONOFLAT


- straightlined, purist design
- high level of comfort thanks to the flat enamelled waste cover that is flush with the shower area
- can be installed to be absolutely flush with the floor
- Total height (g) with horizontal waste fitting: 107 mm; fitting height incl. cover 83 mm (compared to tiled shower areas)
- made of KALDEWEI steel enamel
- ideally complements the CONODUO bath
- designed by Sottsass Associati
- drainage capacity KA 120: 0,85 l/s
- drainage capacity KA 120 vertical: 1,4 l/s

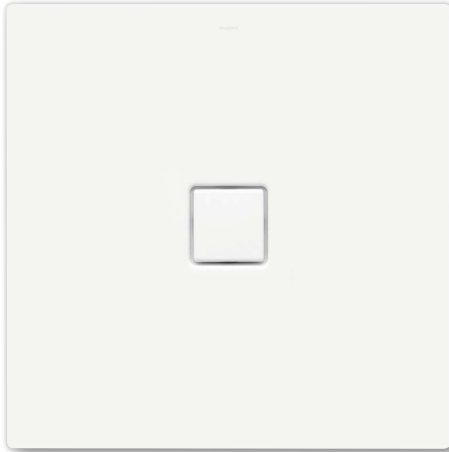

Similar illustration


| | Combined Tray & Waste depth | Waste fitting depth |
|-----------------|-----------------------------|---------------------|
| KA 120 | 107 | 83 |
| KA 120 vertical | 49 | 83 |

See page 291.

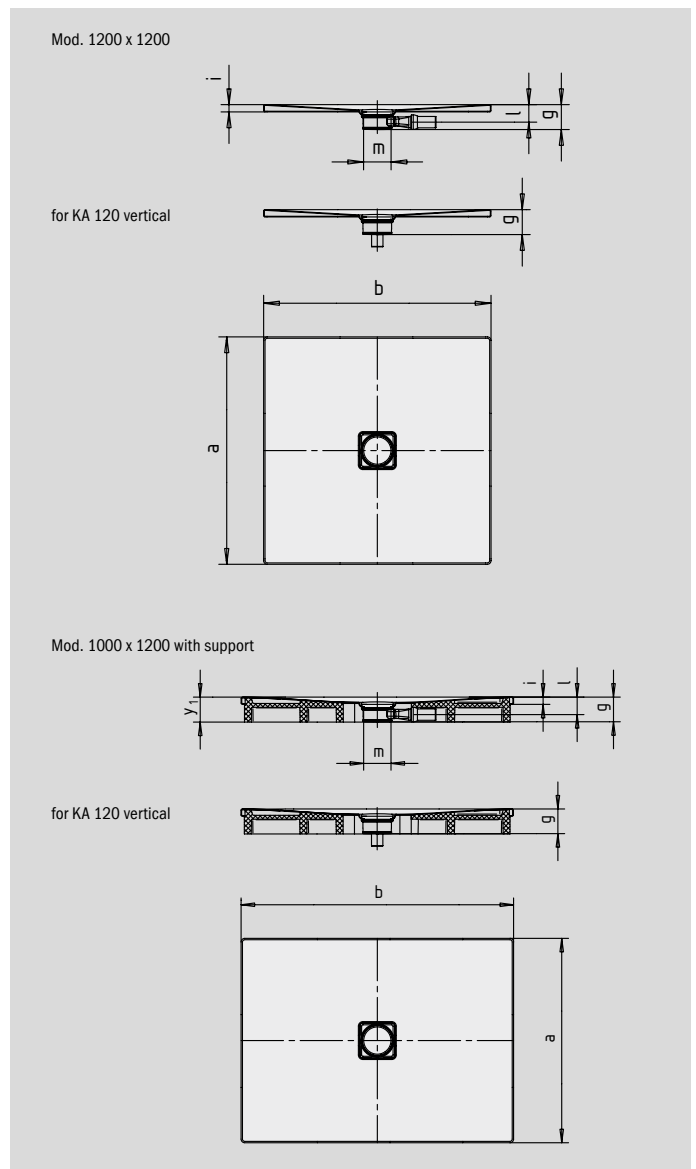

SECURE⁺

| Model No. | 792 | 793 | 794 | 795 | 796 | 855 | |
|---|----------------|------------|------------|------------|------------|------------|---------------|
| External length | a | 900 | 1000 | 800 | 900 | 1000 | 800 mm |
| External width | b | 1300 | 1300 | 1400 | 1400 | 1400 | 1500 mm |
| Height with siphon | g | 107 | 107 | 107 | 107 | 107 | 107 mm |
| Height of rim | i | 32 | 32 | 32 | 32 | 32 | 32 mm |
| Diameter of drain hole | m | 120 | 120 | 120 | 120 | 120 | 120 mm |
| Siphon connection height | l | 76 | 76 | 76 | 76 | 76 | 76 mm |
| Height with support | y ₁ | 110 | 110 | 110 | 110 | 110 | 110 mm |
| Weight of the enamelled shower tray in kg | | 30 | 34 | 29 | 32 | 36 | 33 |
| Anti-slip | | 492 x 492 | 588 x 588 | 492 x 492 | 492 x 492 | 588 x 588 | 492 x 492 mm |
| Full anti-slip | | 836 x 1220 | 932 x 1220 | 740 x 1316 | 836 x 1316 | 932 x 1316 | 740 x 1412 mm |
| SECURE PLUS | | all-over | all-over | all-over | all-over | all-over | all-over |



The TÜV Rheinland confirms the following properties of KALDEWEI's anti-slip, full anti-slip and SECURE PLUS finish:

- Assessment group **B** for wet barefoot areas (**DIN 51097**)
- Assessment group **R 10** for slip-resistant properties in work rooms and areas with an increased risk of slipping (**DIN 51130**)

All CONOFLAT models are available either with anti-slip, full anti-slip or SECURE PLUS.

Model 790 with Full anti-slip or SECURE PLUS fits DIN barrier-free 18040-2.